



Fig. 2

*****-

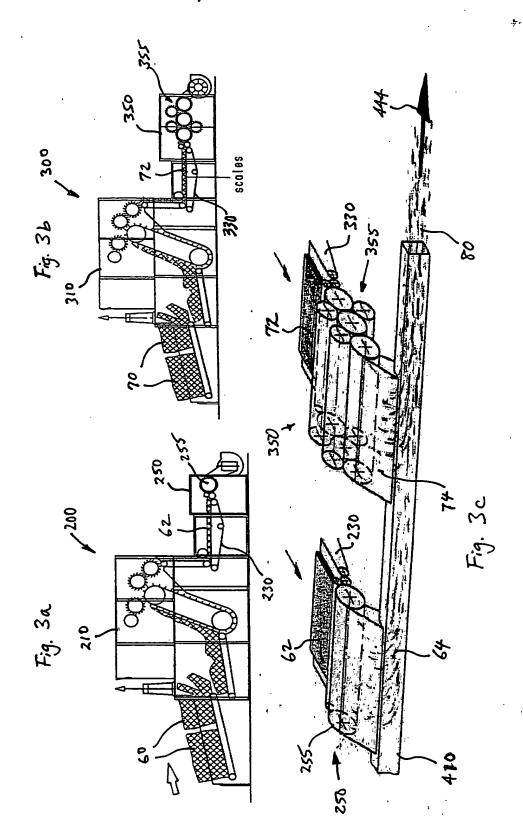

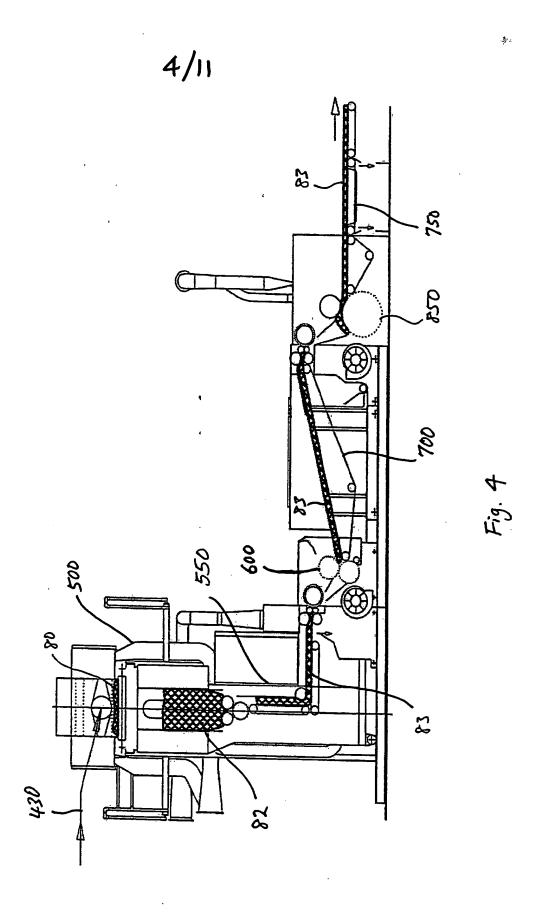

\$

7

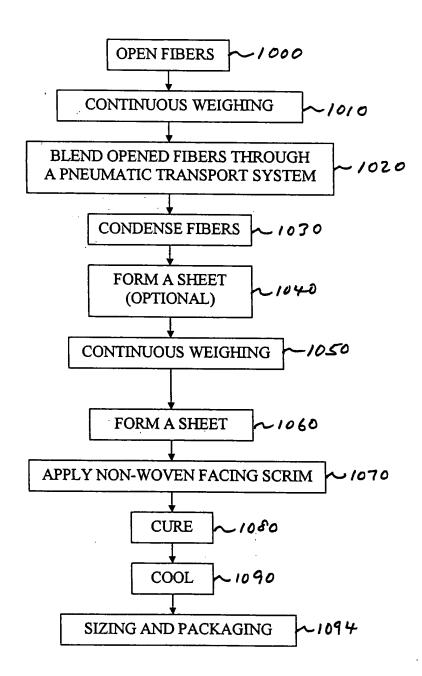


Fig. 5

90% glass fiber, 10% bicomponent plastic fiber 69.3 gm/m2 Fig. 6 Air Filtration Performance Air Filtration Media Test Sample: ─├ Performance Range A: 81-99 gm/m2 (avg. 90 gm/m2) 40 50 Pressure loss (Pa) Conventional Fiber Glass Air Filtration Media 70 -6

Initial efficiency 0.4µm (%)

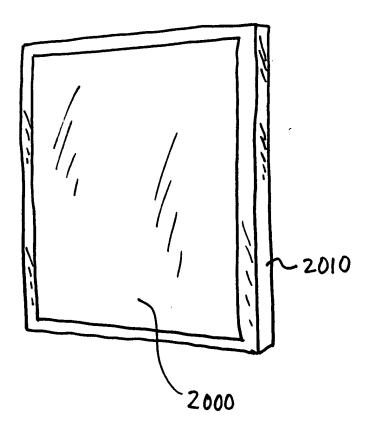


Fig. 7

8/11

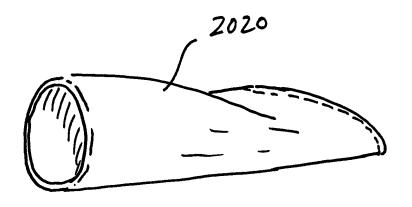


Fig. 8

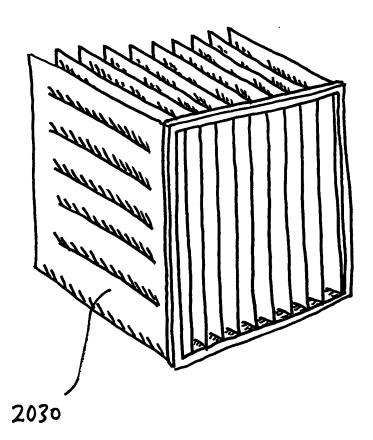


Fig. 9

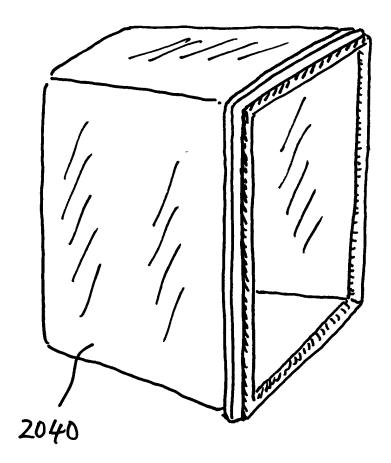


Fig. 10

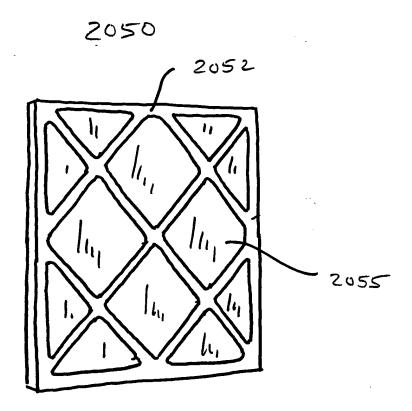


Fig. 11